


## TGLOCK-Hilux-15 Install guide

Hilux 2015 – 2020

Remove tailgate panel


Install tailgate lock unit as pictured

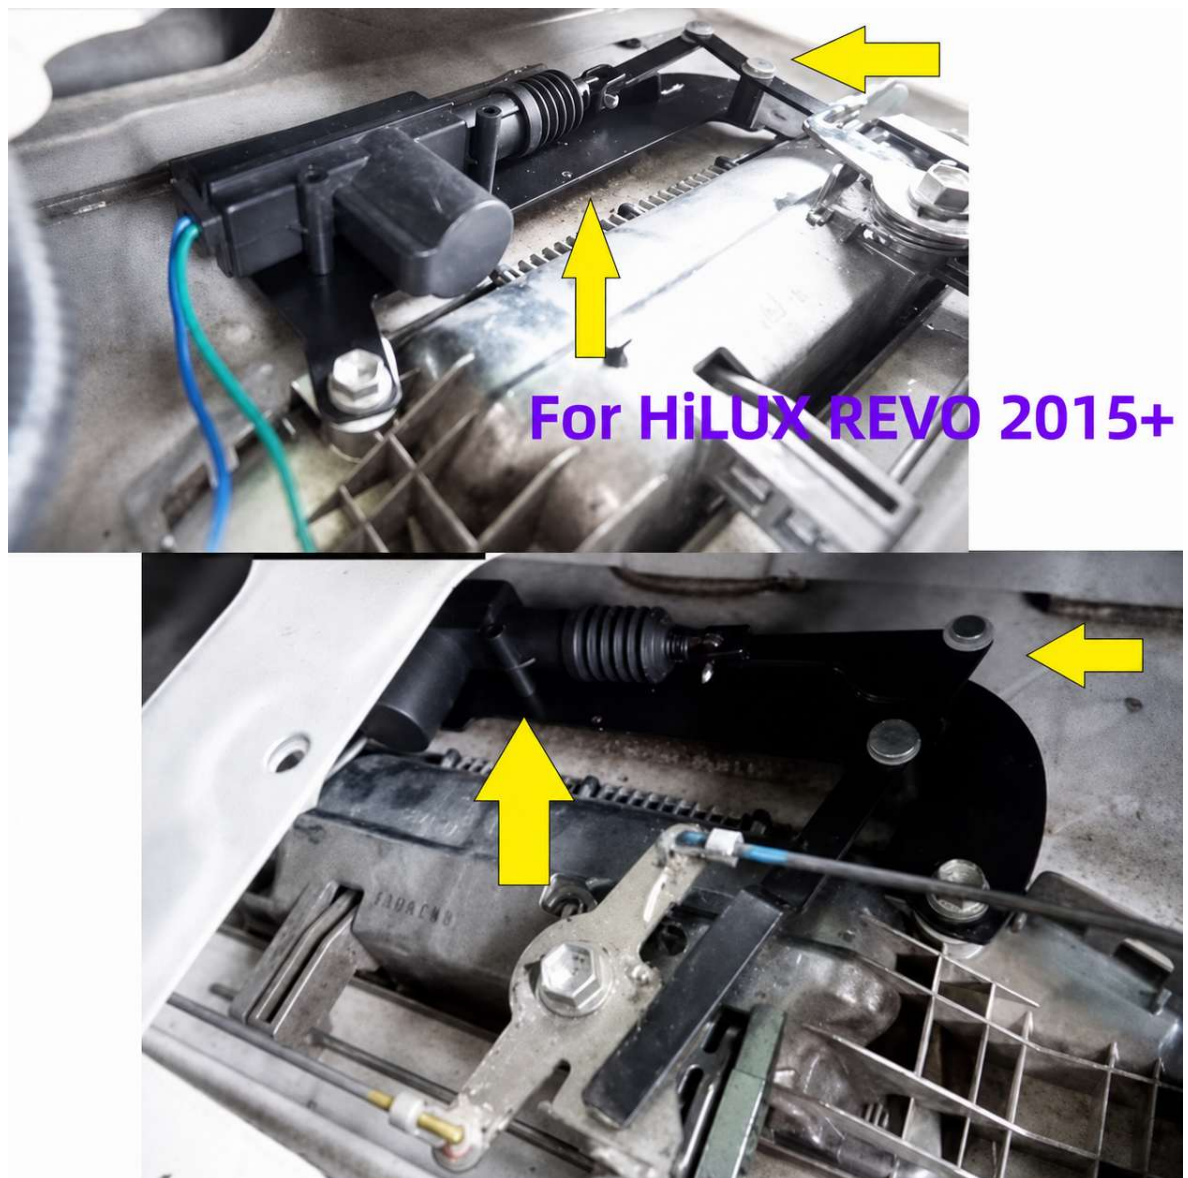

Run wiring along chassis under the vehicle and into the cabin on the RH side.

Remove kick panel and tread plate from drivers door aperture.

Locate connector pictured and find central locking wires (black and white pictured, always test to confirm before installing electronic accessories)

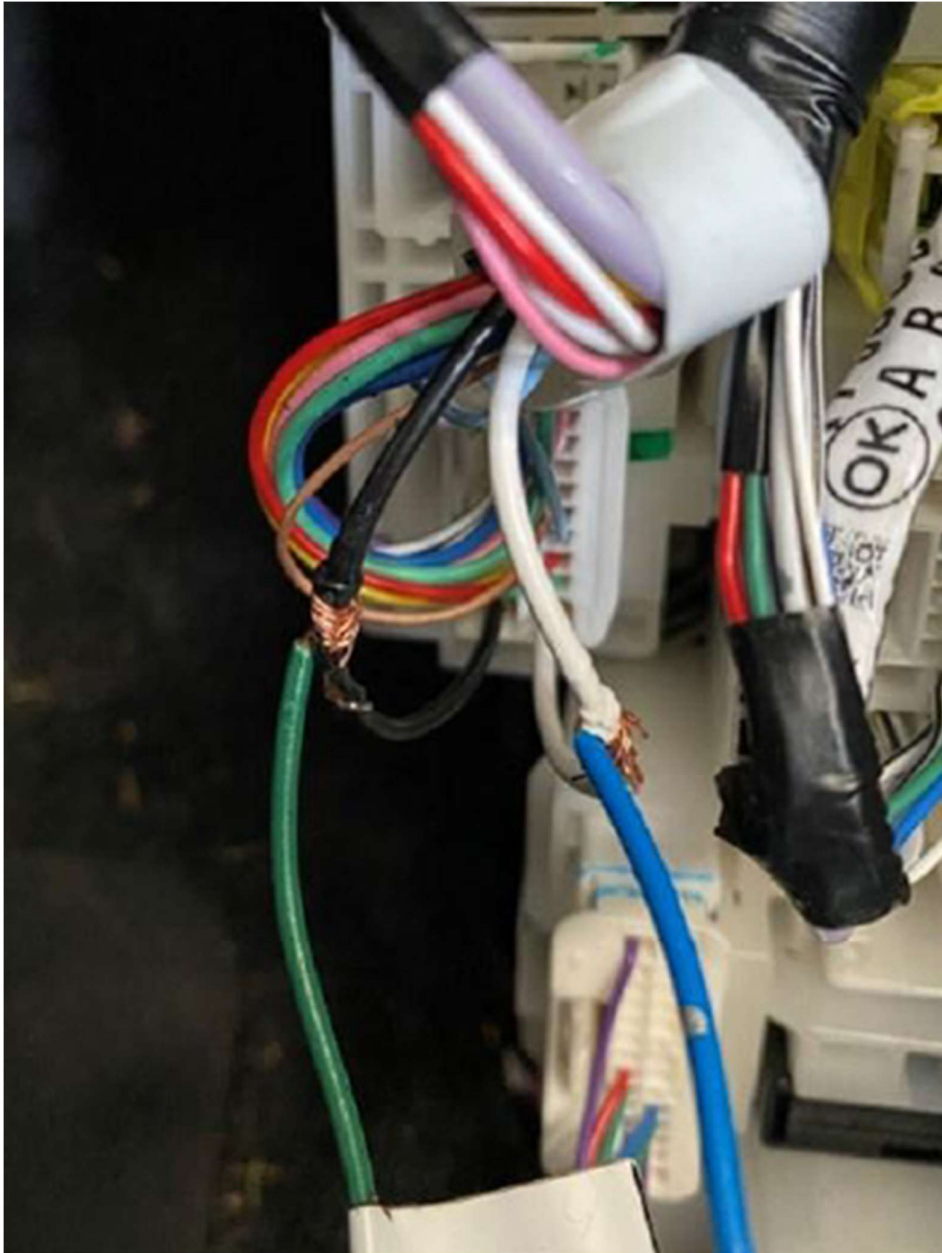

Attache blue wire to LOCK signal.

Attach green wire to UNLOCK signal.

Make sure connections are secure and covered by electrical tape.

Test lock operation and reassemble vehicle.